




Empotrable sumergible 135 mm

Waterproof recessed 135 mm

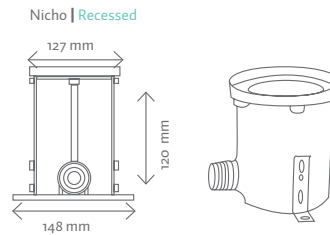


IP68

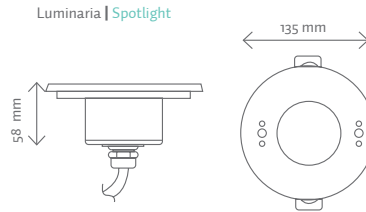

RoHS
COMPLIANT




ESS3x3S-BF



0,5	549,8/1699lx	47,06cm
1	137,4/424,6lx	94,11cm
1,5	51,09/188,7lx	141,17cm
2	34,36/106,1lx	188,23cm
3	15,27/47,18lx	282,34cm
Height	Angle 50,40°	Diameter

ESS3x3A-BF



0,5	472,7/1497lx	47,91cm
1	118,1/374lx	95,82cm
1,5	52,53/166,3lx	143,74cm
2	29,54/93,3lx	191,65cm
3	13,13/41,57lx	287,47cm
Height	Angle 50,40°	Diameter

Empotrable sumergible de diámetro 150mm con haz de luz simétrico o asimétrico. Fabricado con cuerpo y embellecedor de acero 316. Cristal templado de 8mm. Incluye nicho empotrable para su instalación. Para el funcionamiento de los equipos RGB (4 cables) será preciso un controlador tipo PWM. Instalación ideal para piscinas, estanques...

Waterproof recessed 150mm diameter light beam is symmetrical or asymmetrical. Made with stainless steel section 316. 8mm tempered glass. Installation recessed enclosed. RGB (4-wire) control will require PWM driver. Ideal for pools, ponds...

	ESS3x3S-BF	ESS3x3S-BC	ESS3x3S-RGB	ESS3x3A-BF	ESS3x3A-BC	ESS3x3A-RGB
Color Color						
Temp. Temp.	6000°K	3000°K	RGB	6000°K	3000°K	RGB
Alimentación Power supply	24V DC					
Protección Protection	IP68					
Tipo de LED LED Type	4 LEDs 2W					
Flujo lum. Lum. flow	467lm	415lm	R75/G116/B35	467lm	415lm	R75/G116/B35
Ángulo Angle	Symmetric 30°			Asymmetric 50-35°		
Consumo Consume	10W		12W	10W		12W