


# Empotrable sumergible 67 mm


## Waterproof recessed 67 mm




IP68

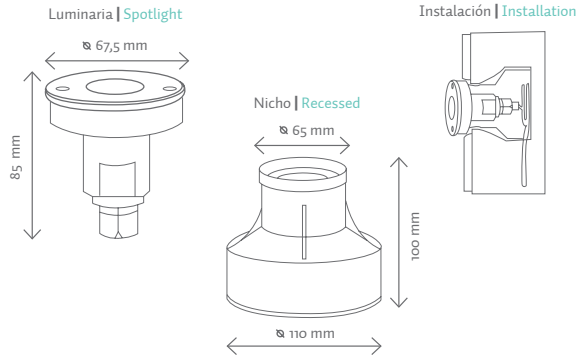

RoHS  
COMPLIANT



Flux out 55,82lm	High	Angle 48,4°	Diameter
351,9/1065lx	44,94cm		
87,98/266,2lx	89,88cm		
33,10/118,3lx	134,83cm		
21,99/66,56lx	179,77cm		
9,775/29,98lx	268,65cm		



Flux out 55,82lm	High	Angle 49,4°	Diameter
326,4/269,3lx	45,99cm		
81,61/67,38lx	91,99cm		
35,27/29,34lx	137,98cm		
20,40/16,84lx	183,98cm		
9,068/7,48lx	275,97cm		

**Empotrable sumergible de diámetro 67,5mm con haz de luz simétrico o asimétrico. Fabricado con cuerpo y embellecedor de acero 316. Cristal templado de 8mm. Incluye nicho empotrable para su instalación. Para el funcionamiento de los equipos RGB (4 cables) será preciso un controlador tipo PWM. Instalación ideal para piscinas, estanques...**

Waterproof recessed 67,5mm diameter with symmetrical or asymmetrical light beam. Made with steel section 316. 8mm tempered glass. Installation recessed enclosed. For RGB (4 wire) equipment will require PWM controller type. Ideal for pools, ponds ...

	ESS1X3S-BF	ESS1X3S-BC	ESS1X3S-RGB	ESS1X3A-BF	ESS1X3A-BC	ESS1X3A-RGB
Color Color						
Temp. Temp.	6000°K	3000°K	RGB	6000°K	3000°K	RGB
Alimentación Power supply	24V DC					
Protección Protection	IP68					
Tipo de LED LED Type	1 LEDS 3W					
Flujo lum. Lum. flow	174lm	139lm	R23/G33/B11lm	174lm	139lm	R23/G33/B11lm
Ángulo Angle	Symmetric 30°			Asymmetric 50-35°		
Consumo Consume	5W		6W	5W		6W